


C102 Gray 8-pin connector

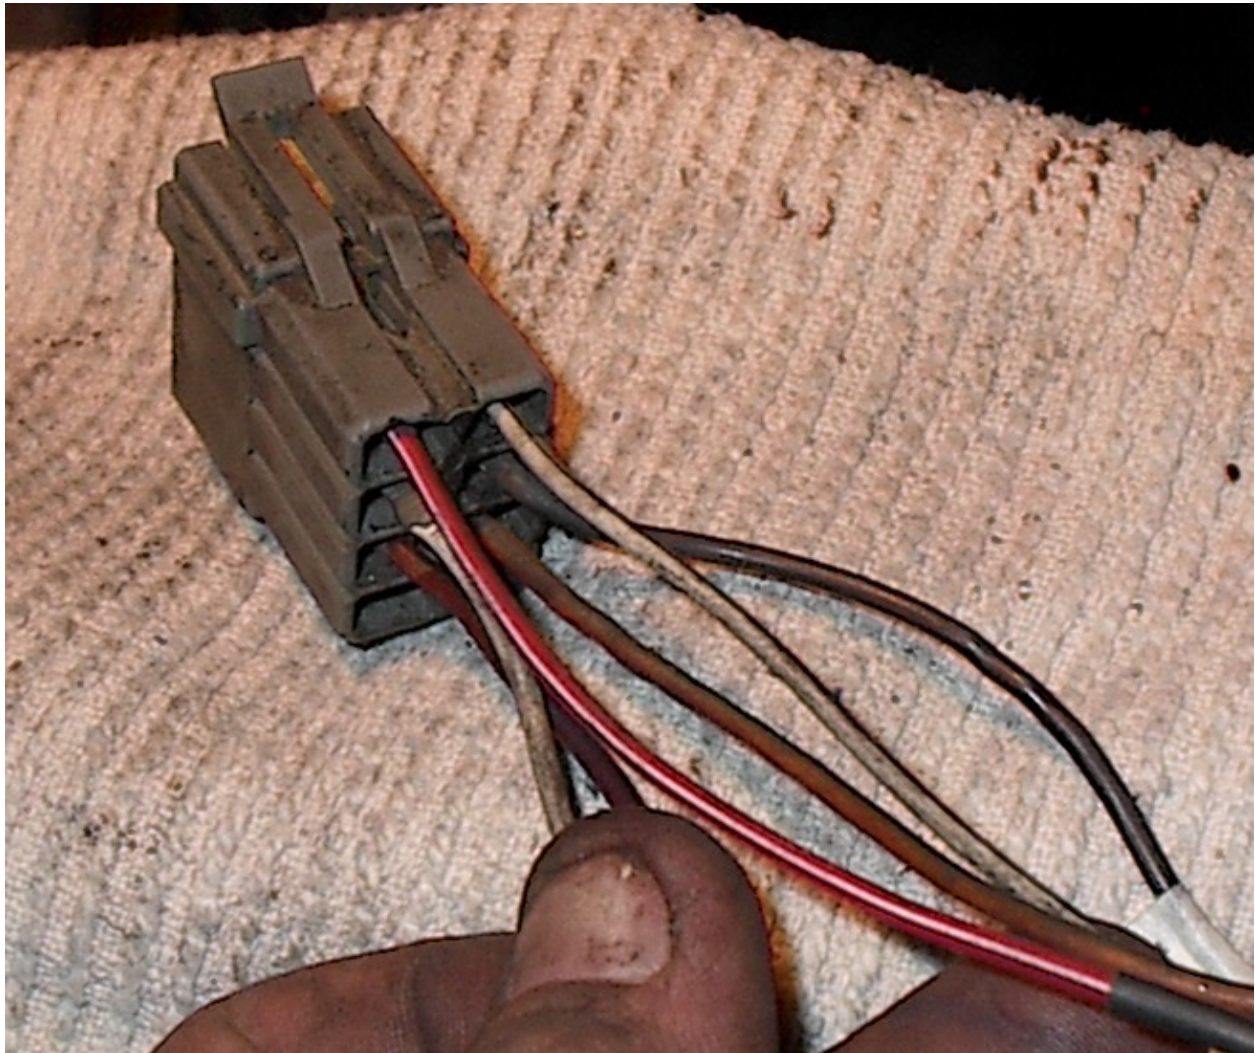

List of wires reused after Duraspark conversion

R/W 39	Red / White	Coolant temperature switch	close with high temp
W/R 31	White / Red	Oil pressure switch	open above 6 PSI
R/Y H 640	Red / Yellow dashes	Carb float bowl vent solenoid	
W/B 4	White / Black	Alternator stator	Alternator to voltage regulator
BR / PK 262	Brown / Pink	Ignition power	+12v in START
O/LB 35	Orange / Light Blue	Alternator field	Alternator to voltage regulator

Connector " C102"
harness on engine side,
wire insertion view

Red / White Coolant temperature switch <i>closes with high temp</i>	red / wht	wht / blk	White / Black Alternator stator <i>Alternator to voltage regulator</i>
White / Red Oil pressure switch <i>opens above 6 PSI</i>	wht / red	brn / pnk	Brown / Pink Ignition power <i>+12v in START</i>
Red / Yellow dashes Carb float bowl vent solenoid <i>used with 2150A carb</i>	red / yel ----	org / l blu	Orange / Light Blue Alternator field <i>Alternator to voltage regulator</i>
EMPTY	X	X	EMPTY